



AMS

Snow plough



The AMS scraper is an underbody plough mounted on special brackets to the carrying truck's frame and designed for all year-round road maintenance. In winter, it is used for effective packed snow and ice removal and maintenance of snowy roads, while in summer it can be used for gravel and forest road maintenance and reshaping.

Highlights


- There are two “fixed to the right” models available – **AM 6** and **AM 6S**, and a new generation, swiveling model **AM 513** for professional operations in all possible conditions.
- **Compact attachment** to the frame makes it possible to install Arctic scrapers even on vehicles with a side plough and short wheelbase from 3600mm.
- **Adjustable working width, large swivel** angle and high ‘mother’ blade keep the material moving in the desired direction.

Your benefits

- **Efficient use with wear blade and pike system:** adjustable attack and inclination angles allow the scraper to be effective on any road surface and in any conditions.
- **Anti-slip on both narrow and wide roads:** extension wings significantly increase working width and prevent snow stripes at sharp corners and roundabouts between the front and side ploughs.
- **User-friendly with professional functionality:** several safety systems, driver's assistants such as constant pressure adjustment, reverse automatism and automation of certain functions.

We know how important it is that your machines and equipment are always ready to deploy. **Get in touch with us** about our range of tailored services and original spare parts.



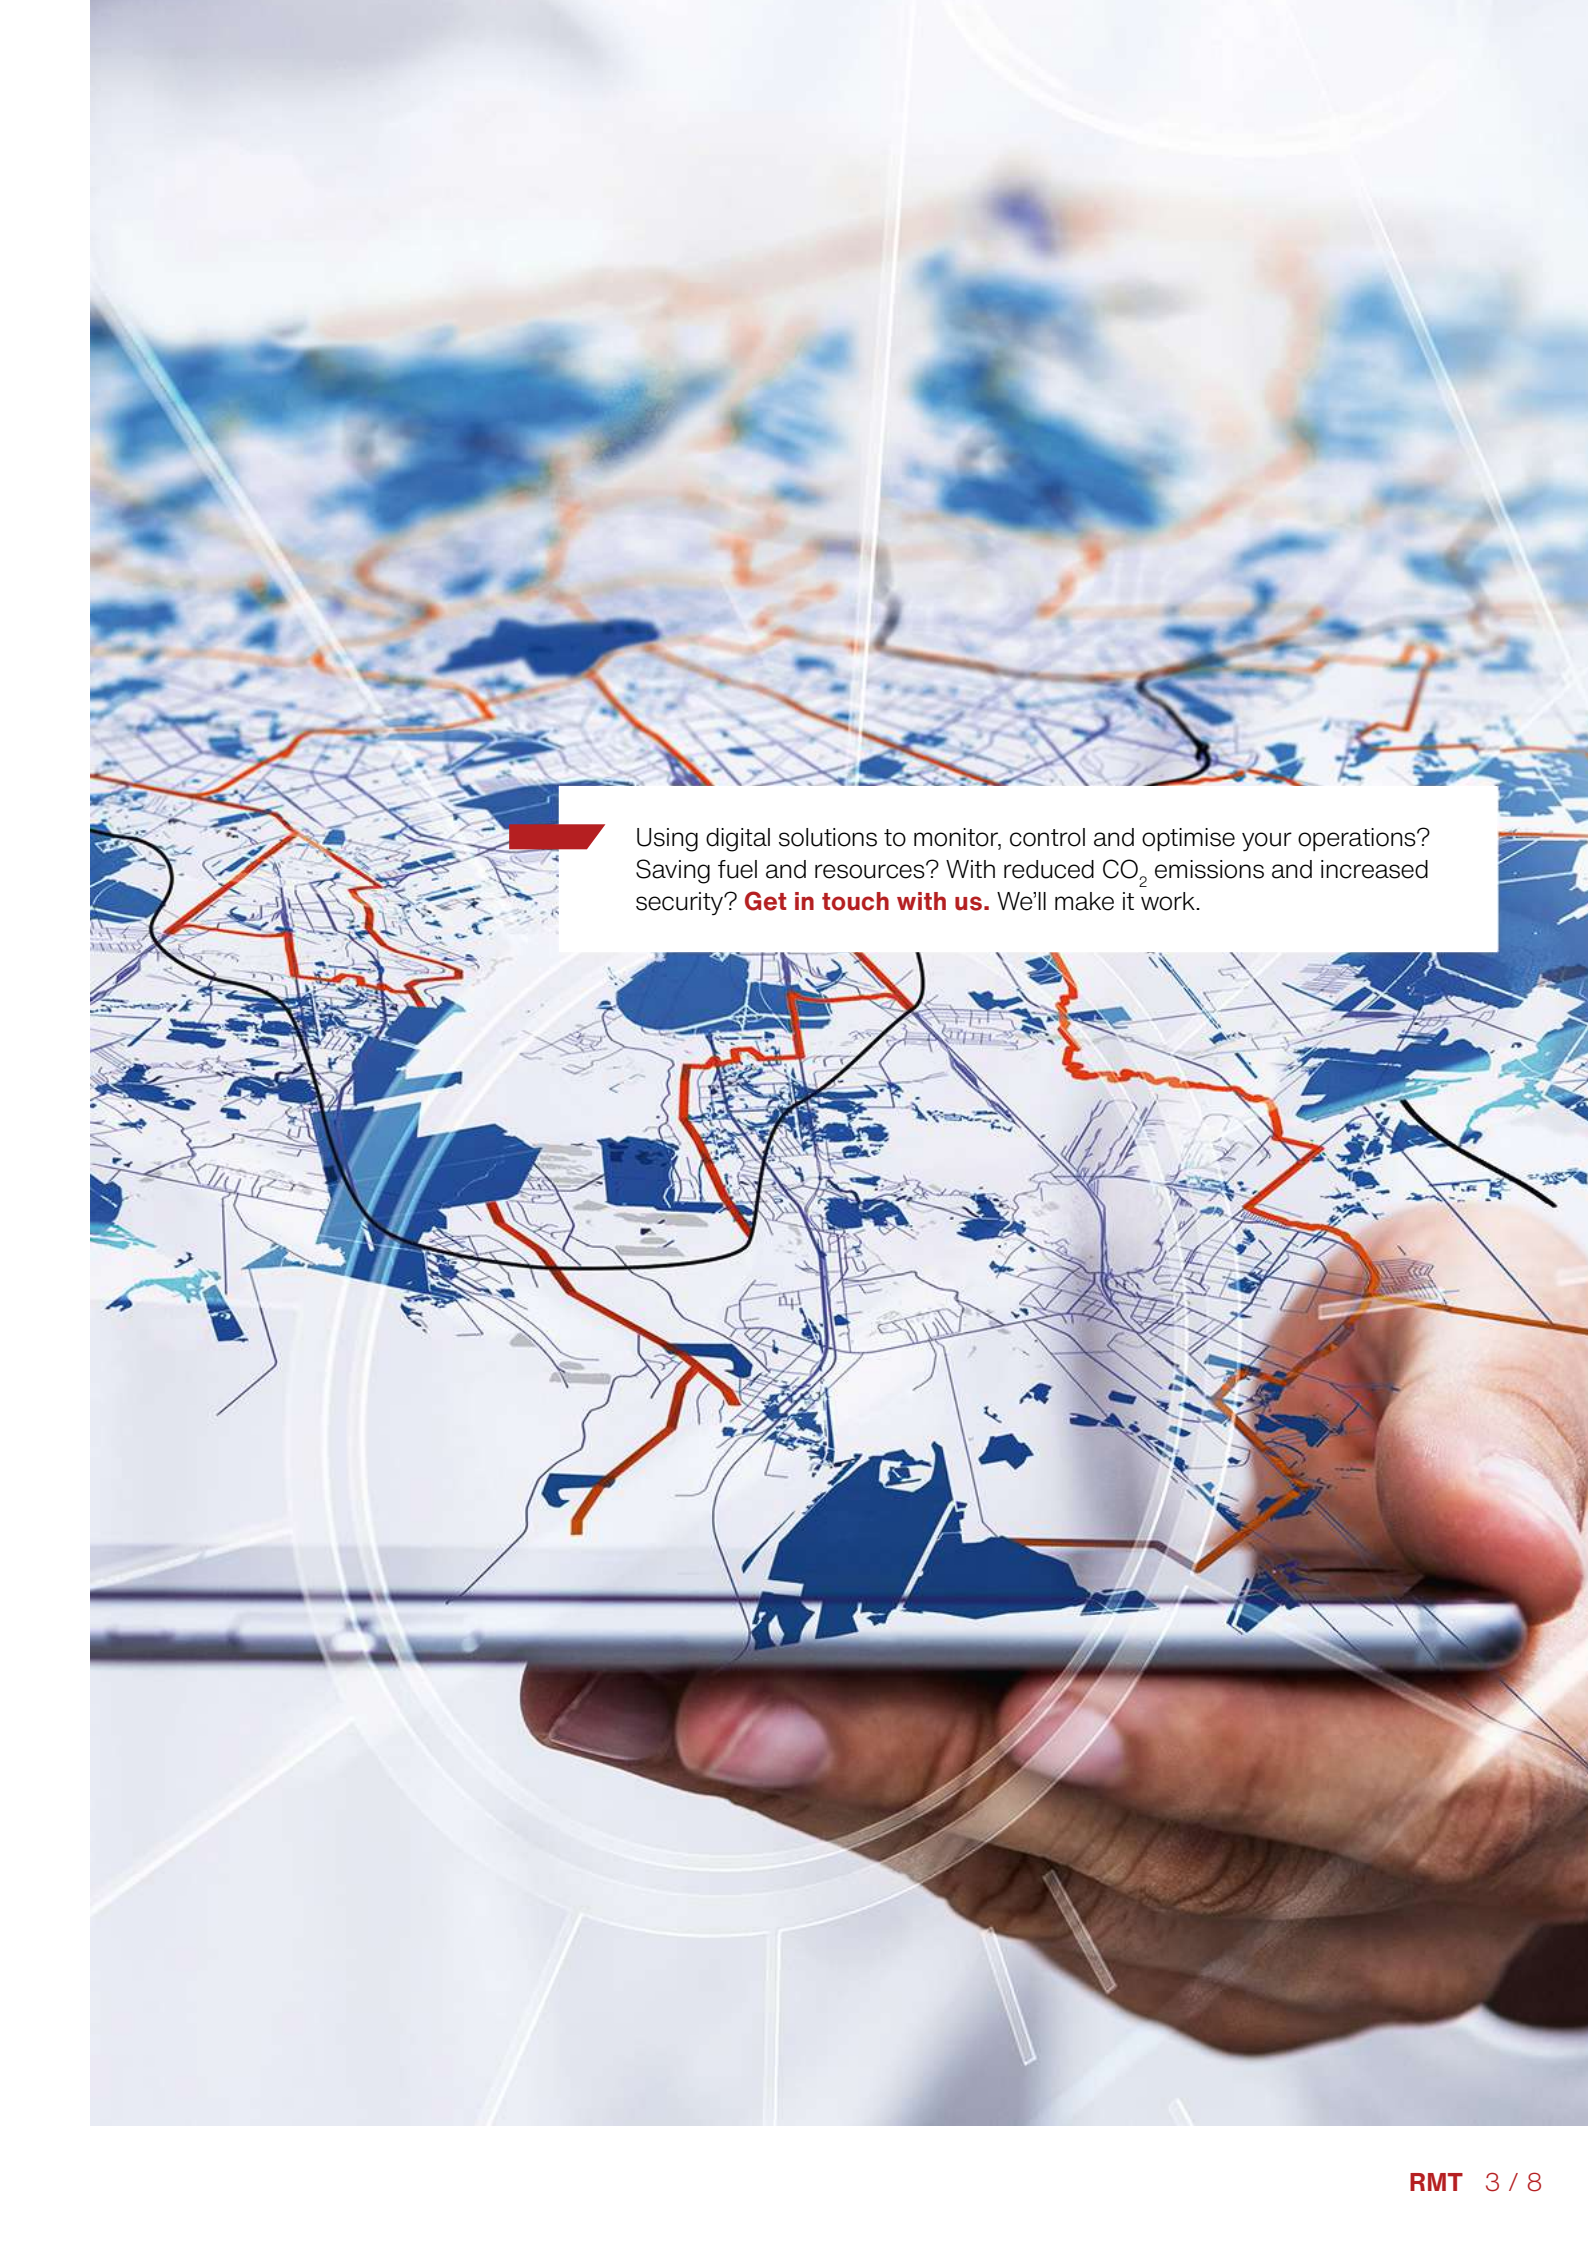

Using digital solutions to monitor, control and optimise your operations? Saving fuel and resources? With reduced CO₂ emissions and increased security? **Get in touch with us.** We'll make it work.

Performance features

Usage

AMS center-mounted scrapers are designed for year-round road maintenance: snow plowing, removal of packed ice and snow, profiling gravel and maintenance of forest road surfaces during the summer months. They are also widely used on jobsites for rough profiling of road surfaces, prior to the use of a road grader for finishing.

They are also very popular for use with timber trucks for maintenance of temporary roads, which is considerably more economical than employing a road grader.

A unique feature of our scrapers is their compact dimensions, meaning they can be installed on short wheel base trucks, which is also possible with the swiveling AMS 513 model.





Scraper wing

The AMS scraper wing was originally designed for heavy-duty use with powerful trucks in very severe conditions and at high operation speeds. Long-term R&D work, the use of ultra-strong steel, smart components and special treatments play a key role in ensuring a long lifespan and the safest ploughing results.

The compact attachment allows a significant height for the mother blade, as well as large extension wings. Depending on the model, each extension wing can increase the working width from 300 to 500mm.

The attack angle of the AMS scraper has stepless adjustment to suit various road surface conditions, as well as various wear blade systems and meeting a variety of final targets.

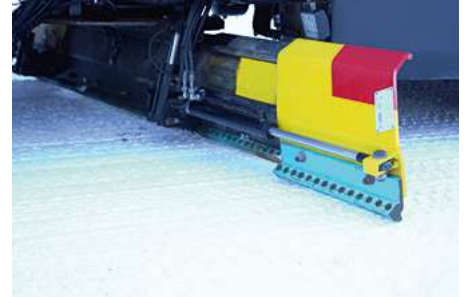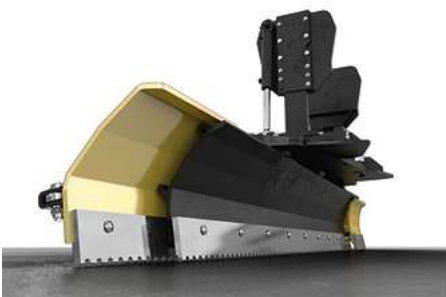

Attachment system

The compact attachment system consists of two frame brackets connected straight to the wing and, in the case of the AMS 513 swiveling model, a compact swiveling table situated between them to ensure a perfect swiveling function. In the transport position, the Scraper stays compact so that there is very small influence to ground clearance.

AMS scrapers have their own valve block and electronic controller and, in the case of the intelligent version of the AMS 513, the AMS 513i, valves are proportional to ensure very precise control of each function and extra smart functionalities. All functions have hydraulic drive thanks to powerful hydraulic cylinders.

Different shape and height versions of the attachment brackets make it possible to install scrapers to almost every vehicle – from low city trucks to all-wheel drive high timber trucks.



Protection systems

The AMS scraper works in very tough conditions, absorbing all impacts between the road surface and the truck body above. Therefore, it is specifically equipped with safety systems as hydraulic accumulators and shock valves, enabling the operator to drive over obstacles and avoid damage to equipment in overload situations. The most advanced version, the **AMS 513i**, has very precise control and adjustment of working pressure and attack angle, which allows the working speed to be increased with a resultant improvement of the ploughing result. The reverse automatism function lifts up the scraper into the transport position as soon as driver switches on reverse gear. When the gear is changed to drive-mode, the scraper automatically returns to its last working position.



Accessories


- Standard pressure regulator
- Intelligent valve package
- Central lubrication preparation
- LED light
- Working lights
- Variety of wear blades
- Pike holders and variety of pikes

Gallery



Variants

AMS 513 (i)

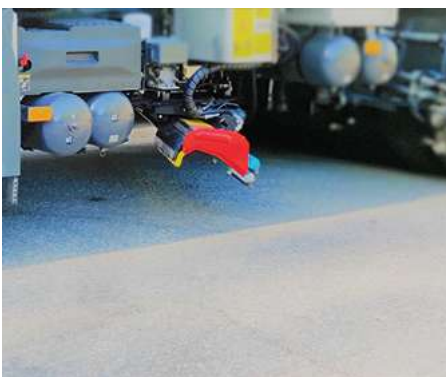

AMS 6



AMS 6 S



Related products

HPD

Snow plough



SHJ

Snow plough





Trust in our many years of uniquely diverse experience. **Get in touch with us.** We'll find the right solution for your specific challenge.

Technical data

	AMS 513 (i)	AMS 6	AMS 6 S
Construction			
Number of extension wings	2	2	2
Attack angle of the blade	80° / 140°	85° / 150°	85° / 150°
Swiveling angle	25° - 0° - 25°	-	-
Lateral inclination angle	14°	13°	13°
Dimensions			
Working width	2,750 - 3,480 mm at 0° 2,485 - 3,095 mm at 24°	2,500 - 3,250 mm at 25°	2,460 - 3,180 mm at 20° 2,400 - 3,080 mm at 24°
Clearance width	2,540 mm at 25°	2,540 mm at 25°	2,540 mm at 25°
Weights			
Approx weight	900 kg	550 kg	550 kg



© Aebi Schmidt Group
www.aebi-schmidt.com

Aebi Schmidt Holding AG
CH-8050 Zurich, Switzerland

All rights reserved. Technical data is subject to change.
Illustrations are not binding. Errors and amendments excepted.

Document created on 24 APR 2024

